

2MP Full-Color Fixed Bullet Network Camera

IPC2C22LE-SF40(60)-WL



Key Features



Optics

1/2.7" CMOS image sensor

Built-in LEDs

2D/3D DNR (Digital Noise Reduction)

Up to 30m (98ft) LED distance

Compression

Ultra 265, H.265, H.264

ROI (Region of Interest)

Network

ONVIF Conformance

Structure

Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)

Wide voltage range of ±25%


IP67

Specifications

	IPC2C22LE-SF40-WL			IPC2C22LE-SF60-WL		
Camera						
Sensor	1/2.7", 2.0 megapixel, progressive scan, CMOS					
Lens	4.0mm@F1.6			6.0mm@F1.6		
DORI Distance	Lens (mm)	Detect (m)	Observe (m)		Recognize (m)	Identify (m)
	4.0	60	24		12	6
	6.0	90	36		18	9
Angle of view (H)	86.5°			55.4°		
Angle of View (V)	44.1°			30.2°		
Angle of View (O)	106.4°			68.1°		
Shutter	Auto/Manual, 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.005Lux (F1.6, AGC ON)					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
WDR	DWDR					
Defog	Digital Defog					
LEDs Number	4					
LED Distance	Up to 30m (98ft)					
Video						
Video Compression	Ultra 265, H.265, H.264					
H.264 code profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps; Sub Stream: 4CIF (704*576), Max 30fps					
Video Bit Rate	128 Kbps~6 Mbps					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 4 areas					
ROI	Up to 8 areas					
Motion Detection	Up to 4 areas					
Image						
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2					
Digital noise reduction	2D/3D DNR					
Flip	Normal/Vertical/Horizontal/180°					
Dewarping	NA					
HLC	Supported					
BLC	Supported					
Network						
Protocols	IPv4, IGMP, ICMP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, UPnP, HTTP					
Compatible Integration	ONVIF (Profile S, Profile T), API					

Client	EZStation EZView EZLive
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
Interface	
Network	10/100M Base-TX Ethernet
Certifications	
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 6W
Dimensions (Ø x H)	169.4x98.1x92.0mm (6.7"x3.9"x3.6")
Net Weight	0.38kg (0.84lb)
Material	Sun shield: plastic Front cover: plastic+metal Body: plastic
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	2KV
Ingress Protection	IP67

Dimensions

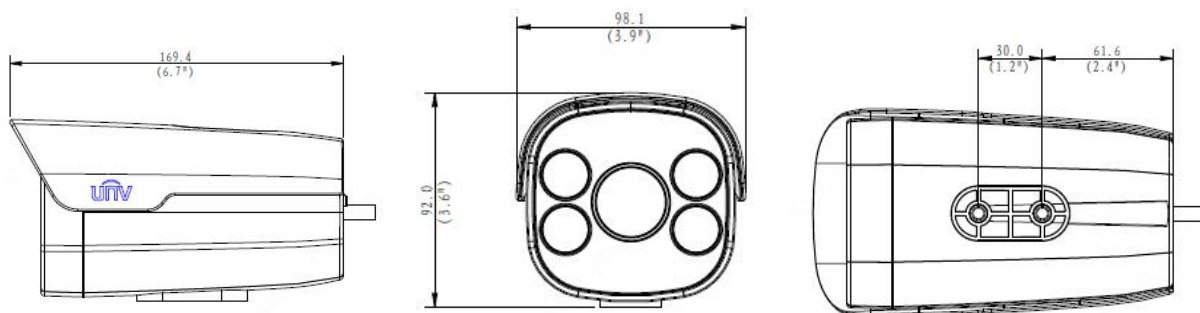

Accessories

TR-WM06-F

TR-WM06-C-IN

TR-UM06-A-IN

TR-UP06-B-IN



Zhejiang Unview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2020 Zhejiang Unview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.