

DH-HAC-HDW1200TQ-IL-T

2MP Smart Dual Light HDCVI Two-way Talk Fixed-focal Eyeball Camera



Series Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Two-way Talk

With its built-in high-sensitivity microphone and high-power speaker, the camera realizes two-way talk through the mobile app.

Smart Dual Light

With its smart dual light mechanism, the camera automatically turns on the white light when Perimeter Protection/SMD Plus function of AI XVR detects a target in the rule area to capture clear, vivid images. When the target leaves the rule area, the camera automatically switches over from the white light to the IR light to significantly reduce light pollution.

Smart Light+

Equipped with advanced LEDs and beam processing technology, the camera effectively reduces interference of stray light, ensuring concentrated illumination within the lens's field of view. This allows the camera to easily produce clear images that reveal the fine details of targets even in low light conditions.

Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

* In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.000004.1.R.220323 or later version.

- Max. 30 fps@1080p
- Two-way Talk
- Smart Dual Light
- Smart Light+
- 3D NR
- Quick-to-install eyeball saves installation time
- 40 m illumination distance
- 3.6 mm fixed lens (2.8 mm optional)
- CVI/CVBS/AHD/TVI switchable
- IP67, 12 VDC



Easy Installation

HDCVI eyeball comes with a quick-to-install pedestal, which makes it easier to install than conventional eyeballs and reduces cost on time and labor.

Protection

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes.

Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.


* Audio input is available for select HDCVI camera models.

Long Distance Transmission


HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.

Technical Specification							
Camera							
Image Sensor							
Max. Resolution							
Scanning System							
Electronic Shutter Speed							
Min. Illumination							
S/N Ratio							
Illumination Distance							
Illuminator On/Off Control							
Illuminator Number							
Angle Adjustment							
Lens							
Lens Type							
Lens Mount							
Focal Length							
Max. Aperture							
Field of View							
Close Focus Distance							
DORI Distance	Lens		Detect	Observe	Recognize		
	2.8 mm		40.6 m (133.20 ft)	16.2 m (53.15 ft)	8.1 m (26.57 ft)		
	3.6 mm		49.9 m (163.71 ft)	20.0 m (65.62 ft)	10.0 m (32.81 ft)		
*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.							
Video							
Video Frame Rate							
Resolution							
Day/Night							
BLC							
WDR							
White Balance							
Gain Control							
Noise Reduction							
Illumination Mode							
Mirror							
Certification							
Certifications							
Audio							
Built-in Mic							
Camera Audio							
Two-way Talk							
Speaker							
Port							
Video Output							
Power							
Power Supply							
Power Consumption							
Environment							
Operating Temperature							
Operating Humidity							
Storage Temperature							
Storage Humidity							
Protection							
Anti-corrosion Level							
Structure							
Casing Material							
Product Dimensions							
Net Weight							
Gross Weight							
Installation							
Ordering Information							
Type							
Model							
Description							
HDCVI CAMERA							
DH-HAC-HDW1200TQN-IL-T							
2MP Smart Dual Light HDCVI Two-way Talk Fixed-focal Eyeball Camera,NTSC							
DH-HAC-HDW1200TQP-IL-T							
2MP Smart Dual Light HDCVI Two-way Talk Fixed-focal Eyeball Camera,PAL							

Type	Model	Description
Accessories (Optional)	DH-PFB220C	Ceiling Mount Bracket
	DH-PFA109	Mount Adapter
	DH-PFA151	Corner Mount Bracket
	DH-PFB305W	Wall Mount Bracket
	DH-PFA150	Pole Mount Bracket
	DH-PFA152-E	Pole Mount Bracket
	DH-PFB205W-E	Wall Mount Bracket
	DH-PFA13G	Junction Box
	DH-PFM800-E	1 Channel Passive HDCVI Balun
	DH-PFM321-EN	DC12V1A power adapter
	DH-PFM320D-EN	DC12V2A power adapter
	PFM904	Integrated Mount Tester

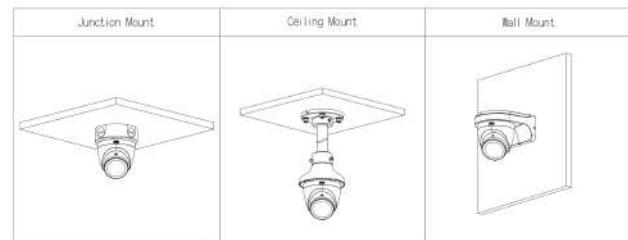

Dimensions (mm[inch])

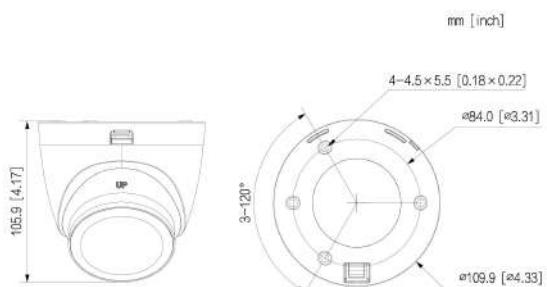

Accessories

Optional:



DH-PFA109
Mount Adapter



DH-PFA13G
Junction Box



DH-PFA150
Pole Mount Bracket



DH-PFA151
Corner Mount Bracket



DH-PFA152-E
Pole Mount Bracket



DH-PFB205W-E
Wall Mount Bracket



DH-PFB220C
Ceiling Mount Bracket



DH-PFB305W
Wall Mount Bracket



DH-PFM320D-EN
DC12V2A power adapter



DH-PFM321-EN
DC12V1A power adapter



DH-PFM800-E
1 Channel Passive HDCVI
Balun



PFM904
Integrated Mount Tester