

DH-HAC-HFW1209TLM-IL-A

2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera



Series Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Smart Dual Light

With its smart dual light mechanism, the camera automatically turns on the white light when Perimeter Protection/SMD Plus function of AI XVR detects a target in the rule area to capture clear, vivid images. When the target leaves the rule area, the camera automatically switches over from the white light to the IR light to significantly reduce light pollution.

Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

- * The parameters and datasheets below can only be applied to 1209-IL-S3 series.
- * In order to use the Smart Dual Light HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000004.1.R.220323 or later version.
- Max. 30 fps@1080p.
- 3D NR.
- Smart Dual Light.
- 40 m illumination distance.
- Super Adapt.
- Built-in Mic.
- 3.6 mm fixed lens (2.8 mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



Advanced 3DNR

Dahua's advanced 3DNR technology reduces image noise with little to no impact on image sharpness, especially in poor lighting conditions. It detects the noise, and compares the sequential frames to effectively reduce the noise. It also makes efficient use of bandwidth, saving on storage space.

Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes.

Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Technical Specification

Camera

| | |
|----------------------------|---|
| Image Sensor | 2 MP CMOS |
| Max. Resolution | 1920 (H) × 1080 (V) |
| Scanning System | Progressive |
| Electronic Shutter Speed | PAL: 1/25 s–1/100,000 s; NTSC: 1/30 s–1/100,000 s |
| Min. Illumination | 0.002 lux@F1.6 (Color, 30 IRE) 0.0002 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on) |
| S/N Ratio | >65 dB |
| Illumination Distance | 40 m (131.23 ft) |
| Illuminator On/Off Control | Auto;Manual |
| Illuminator Number | 2 (Multi-core light) |
| Angle Adjustment | Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360° |

Lens

| | |
|----------------------|---|
| Lens Type | Fixed-focal |
| Lens Mount | M12 |
| Focal Length | 2.8 mm; 3.6 mm |
| Max. Aperture | F1.6 |
| Field of View | 2.8 mm: H: 108°; V: 58°; D: 127° 3.6 mm: H: 86°; V: 47°; D: 100° |
| Iris Control | Fixed |
| Close Focus Distance | 2.8 mm: 0.7 m (2.30 ft) 3.6 mm: 1.0 m (3.28 ft) |

| DORI Distance | Lens | Detect | Observe | Recognize | Identify |
|---------------|--------|------------------------|-----------------------|-----------------------|----------------------|
| | 2.8 mm | 42.2 m (138.45 ft) | 16.9 m (55.45 ft) | 8.4 m (27.56 ft) | 4.2 m (13.78 ft) |
| | 3.6 mm | 53.7 m (176.18 ft) | 21.5 m (70.54 ft) | 10.7 m (35.10 ft) | 5.4 m (17.72 ft) |

*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.

Video

| | |
|------------------|---|
| Video Frame Rate | CVI: PAL: 1080p@25 fps NTSC: 1080p@30 fps AHD: PAL: 1080p@25 fps NTSC: 1080p@30 fps TVI: PAL: 1080p@25 fps NTSC: 1080p@30 fps CVBS: PAL: 960H NTSC: 960H |
| Resolution | 1080p (1920 × 1080); 960H (960 × 576/960 × 480) |
| Day/Night | Auto(ICR)/Color/B/W |

| | |
|-------------------|-------------------------------|
| BLC | BLC; HLC; WDR |
| WDR | DWDR |
| White Balance | Auto;Area white balance |
| Gain Control | Manual;Auto |
| Noise Reduction | 3D NR |
| Illumination Mode | Smart IR&WL; WL Mode; IR Mode |
| Mirror | Yes |
| Privacy Masking | Off/On (8 areas, rectangle) |

Certification

| | |
|----------------|---|
| Certifications | CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; |
|----------------|---|

Port

| | |
|--------------|--|
| Video Output | Video output choices of CVI/TVI/AHD/CVBS by one BNC port |
| Audio Input | One channel built-in Mic |

Power

| | |
|-------------------|----------------------------|
| Power Supply | 12 VDC ± 30% |
| Power Consumption | Max 4.0 W (12 VDC, LED on) |

Environment


| | |
|-----------------------|--------------------------------------|
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Operating Humidity | <95% (RH), non-condensing |
| Storage Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Storage Humidity | <95% (RH), non-condensing |
| Protection | IP67 |
| Anti-corrosion Level | Basic Protection |

Structure


| | |
|--------------------|---|
| Casing Material | Metal front cover + plastic rear barrel + metal bracket |
| Product Dimensions | 198.4 mm × 80.2 mm × 76.2 mm (7.81" × 3.16" × 3.00") |
| Net Weight | 0.29 kg (0.64 lb) |
| Gross Weight | 0.45 kg (0.99 lb) |
| Installation | Wall mount; ceiling mount; vertical pole mount |

Ordering Information

| Type | Model | Description |
|------------------------|-------------------------|---|
| HDCVI CAMERA | DH-HAC-HFW1209TLM-IL-A | 2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera, PAL |
| | DH-HAC-HFW1209TLMN-IL-A | 2MP Smart Dual Light HDCVI Fixed-focal Bullet CameraL, NTSC |
| Accessories (Optional) | G3416GW | G3/4" Water Joint |
| | DH-PFA130-E | Water-proof Junction Box |
| | DH-PFA151 | Corner mount bracket |
| | DH-PFA152-E | Pole Mount Bracket |
| | DH-PFA134 | Junction box |
| | DH-PFM321-EN | DC12V1A power adapter |
| | DH-PFM321D-EN | DC12V 1A power adapter |
| | DH-PFM320D-EN | DC12V2A power adapter |
| | DH-PFM800-E | 1 Channel Passive HDCVI Balun |
| | PFM904 | Integrated Mount Tester |

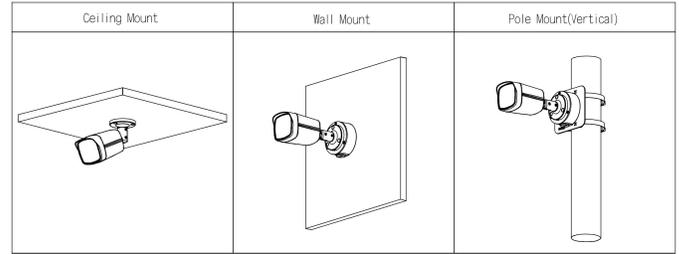

Dimensions (mm[inch])

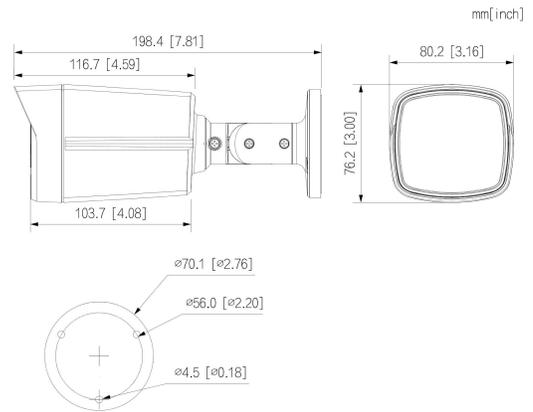

Accessories

Optional:



DH-PFA130-E
Water-proof Junction Box



DH-PFA151
Corner mount bracket



DH-PFA152-E
Pole Mount Bracket



DH-PFA134
Junction box



DH-PFM800-E
1 Channel Passive HDCVI Balun



DH-PFM321-EN
DC12V1A power adapter



DH-PFM321D-EN
DC12V 1A power adapter



DH-PFM320D-EN
DC12V2A power adapter



PFM904
Integrated Mount Tester